(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 27 April 2006 (27.04.2006)

(10) International Publication Number WO 2006/043708 A1

- (51) International Patent Classification: G11B 7/26 (2006.01)
- (21) International Application Number:

PCT/JP2005/019642

- (22) International Filing Date: 19 October 2005 (19.10.2005)
- (25) Filing Language: English
- (26) Publication Language:

English

(30) Priority Data: 2004-306272


21 October 2004 (21.10.2004)

- (71) Applicant (for all designated States except US): RICOH COMPANY, LTD. [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo 1438555 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): FUJITA, Shigeru [JP/JP]; 2-48, Kouyoucho, Sagamihara-shi, Kanagawa 2291114 (JP). KOTAKA, Kazuhiro [JP/JP]; 25-14-607, Shimoseya 2-chome, Seya-ku, Yokohama-shi, Kanagawa 2460035 (JP). TANAKA, Nobuhiro [JP/JP]; 133-5, Aina, Atsugi-shi, Kanagawa 2430038 (JP).

- (74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo 1506032 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEAT INSULATING STAMPER STRUCTURE

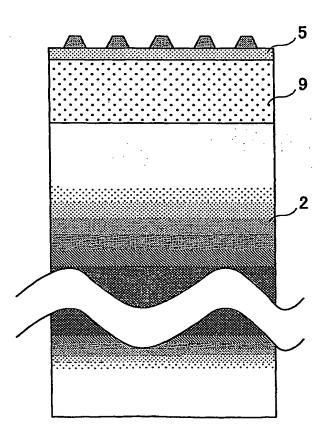

(57) Abstract: A heat insulating stamper is The heat insulating stamper includes disclosed. an uppermost section made of a metal material, a lowermost section made of the same material as the uppermost section, and a middle section having a heat conductivity lower than the uppermost section. The middle section includes the same metal material as the uppermost section and the lowermost section, and heat insulating portions.





Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.